



Korniche products
Supplied by CRL
www.crlonline.co

CASEMENT WINDOW



SPECIFICATION



Korniche products

Supplied by CRL

www.crlonline.co

SIGHTLINES

FRAME 70 MM, SASH 70 MM

GLAZING

MAX. 44 MM, MIN. 23 MM

MAXIMUM SASH DIMENSIONS

SLIM SASH (SIDE HUNG): WIDTH (L) 750 MM, HEIGHT (H) 1500 MM
SLIM SASH (TOP HUNG): WIDTH (L) 1200 MM, HEIGHT (H) 1500 MM
HEAVY DUTY SASH (SIDE HUNG): WIDTH (L) 950 MM, HEIGHT (H) 1750 MM
HEAVY DUTY SASH (TOP HUNG): WIDTH (L) 1800 MM, HEIGHT (H) 1800 MM

MAXIMUM SASH WEIGHT


SIDE HUNG SLIM SASH: 35 KG
TOP HUNG SLIM SASH: 50 KG
SIDE HUNG HEAVY DUTY SASH: 42 KG
TOP HUNG HEAVY DUTY SASH: 100 KG

COLOUR

POWDER COATING RAL FINISH
STANDARD 7016M, 9005M, 9016G
AVAILABLE IN 150+ RAL FINISHES
TEXTURED FINISH AVAILABLE
SPLIT COLOR FOR INTERIOR/EXTERIOR
WOOD EFFECT POWDER COATING
ANODIZED ALUMINIUM

BFRC Rating


kWh/(m².yr)



Double glazing

BFRC Rating

kWh/(m².yr)



Triple glazing



FEATURES		
U value		Double glazing * Uw from 1.4 (W/m ² K) Triple glazing * Uw ≥ 1.0 (W/m ² K)
Acoustic insulation		Rw up to 45 dB
Air permeability		Class 4
Water tightness		Class E1200
Wind resistance		Class CE 2400
Security test	 PAS24 ✓	Passed

* Double glazing Ug=1.0 / Triple glazing Ug=0.5

Security test: Reference test 1.438 x 1.33 m / 1 sash

CONFIGURATIONS





Korniche products


Supplied by CRL

www.crlonline.co


FRAME & SASH

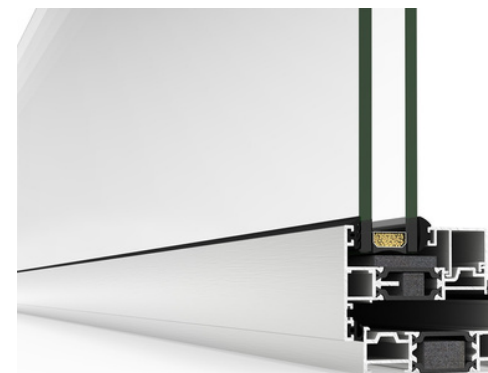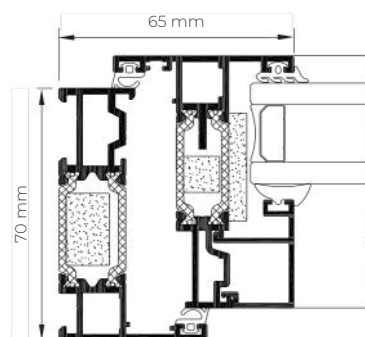


DRAINAGE SUBCILLS

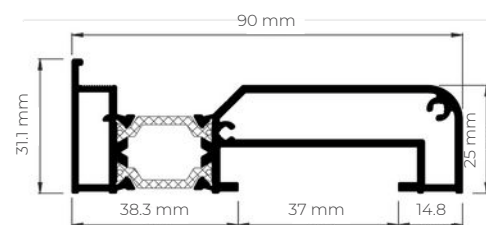


90 MM

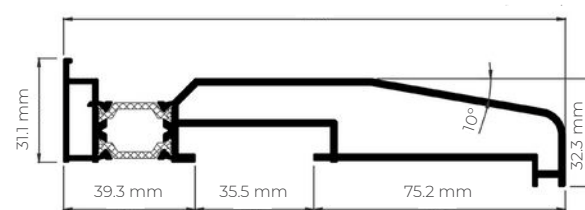

150 MM




180 MM




230 MM

HEAD EXTENSION

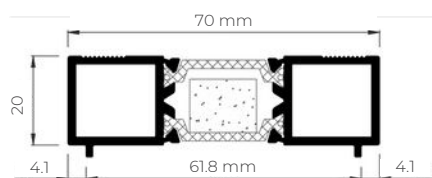

HEAD EXTENSION 20 MM

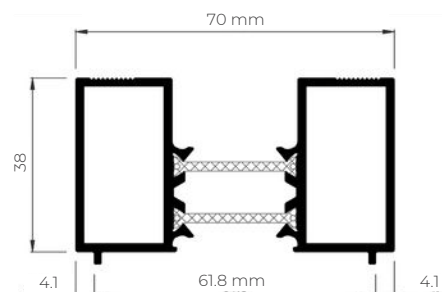

HEAD EXTENSION 38 MM

OPENING POSSIBILITIES



Outward Opening
Side hung
Top hung

POSSIBILITIES



SECURITY
HARDWARE



CONCEALED
HINGES

HARDWARE



Korniche products

Supplied by CRL

www.crlonline.co



Regardless of whether you're looking to maintain modern aesthetics or a more traditional style, our choice of colours will suit you. We have a range of handle options to choose from to achieve the perfect look.

The aluminium casement windows that we supply have been carefully designed to be thermally efficient. With a U-value of $1.4 \text{ W/m}^2\text{K}$, your or your customer's home will be comfortable all year round.







Korniche products

Supplied by CRL

www.crlonline.co